



Deluxe

65-1/2" H sliding shower door with 1/8"-thick glass

572114-G10

Features

- Reversible top track and towel bar allow a choice between rounded or accented design
- Tempered glass ensures enhanced safety and durability
- Continuous guide mechanism for smooth, quiet sliding action and easy cleaning

Material

- Framed, 1/8" (3 mm) thick Pebbled tempered glass
- Anodized aluminum prevents rust and corrosion

Installation


- Fits opening widths 43-7/8" – 48-7/8" (1114 – 1241 mm)
- 65-1/2" (1664 mm) high, with 63-5/16" (1608 mm) minimum head clearance
- 3/8" (10-mm) out-of-plumb adjustability on each side simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- For residential use only
- Not for use in hospitality

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components:
Hardware kit

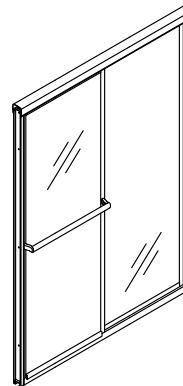

Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

STERLING® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description





N Nickel

Available Glass Options

Code Description

G10 Pebbled

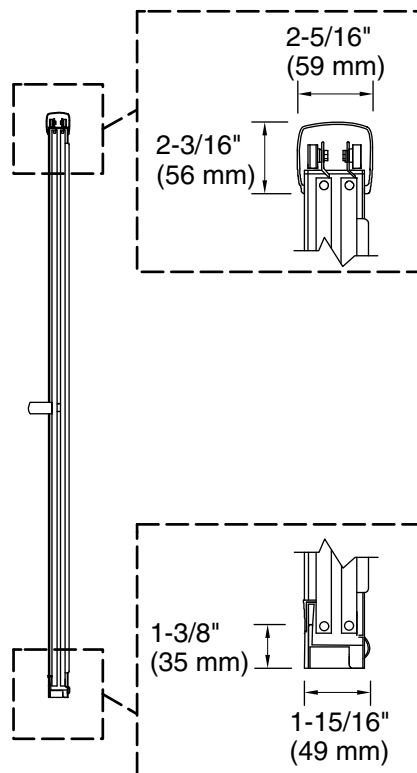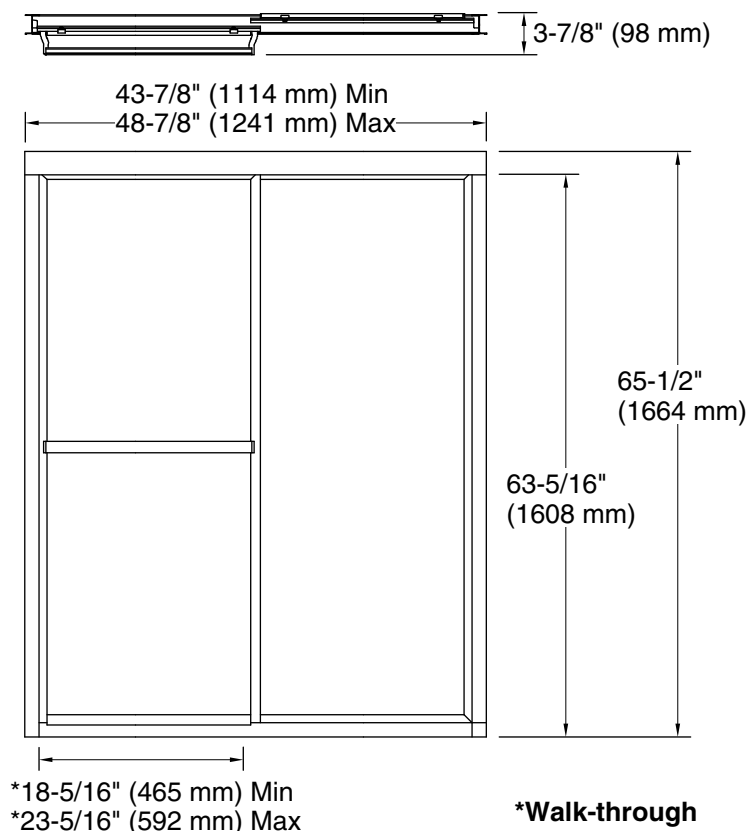

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - 43-7/8" (1114 mm)
Min:

Opening Width - 48-7/8" (1241 mm)
Max:

Walk-through - Min: 18-5/16" (465 mm)

Walk-through - Max: 23-5/16" (592 mm)

Base-To-Wall 1/2" (13 mm)

Radius – Max:

Glass thickness: 1/8" (3 mm)

Notes

The vertical opening should be a minimum of 67" (1702 mm) to allow for installation clearance.