

# 65-1/2" H pivot shower door with 1/8"-thick glass 572118-3G06

#### Features

- Full-length magnetic door latch
- 5" (127 mm) inline panel 5/32" (4 mm) thick
- Tempered glass ensures enhanced safety and durability

#### Material

- Framed, 1/8" (3 mm) thick Rain tempered glass
- Anodized aluminum prevents rust and corrosion

### Installation

- Fits opening widths 27-1/2" 31-1/4" (699 794 mm)
- 65-1/2" (1664 mm) high, with 64" (1626 mm) minimum head clearance
- 3/8" (10·mm) out-of-plumb adjustability on each side simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- For residential use only
- Not for use in hospitality



## **Codes/Standards**

ANSI Z97.1 CAN/CGSB-12.1 CPSC 16CFR 1201

## STERLING® Bath and Shower Doors Three-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

Color tiles intended for reference only.

#### Color Code Description

S Silver

## **Available Glass Options**


Code Description

G06 Rain

# Deluxe

STERLING. A KOHLER. COMPANY 65-1/2

65-1/2" H pivot shower door with 1/8"-thick glass 572118-3G06

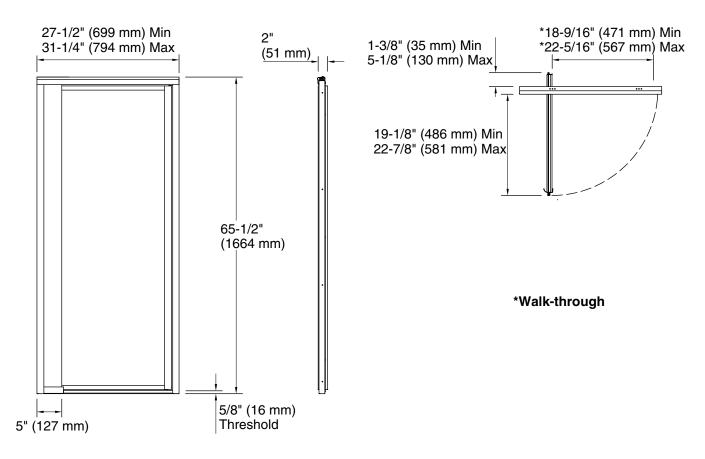

## **Technical Information**

All product dimensions are nominal. Installation type: For shower base installation

Base-To-Wall Radius – Max: 3/8" (10 mm)

#### Notes

The vertical opening should be a minimum of 67" (1702 mm) to allow for installation clearance.