



Features

- Tongue-and-groove modular design allows for easy installation during any phase of construction.
- Modern subway tile design.
- Full-length shelf provides generous storage.
- Easy-to-clean, durable high-gloss finish.
- Factory-installed Aging in Place backerboards for future grab bar installation.

Material

- Compression molded from our exclusive solid Vikrell® material.

Installation

- Pro4™ installation system features a two-piece back wall design, enabling one-person handling and installation.
- Alcove.
- Center drain.
- Caulk-free installation.


Recommended Products/Accessories

80001012 12" straight grab bar
80001018 18" straight grab bar
80001024 24" straight grab bar
K-23733 Vikrell® cleaner
581075-48 Frameless sliding shower door
547808-48 Frameless sliding shower door
5475-48 Frameless sliding shower door
5477-48 Frameless sliding shower door
5485-48 Frameless sliding shower door
5970-48 Framed sliding shower door
5970-46 Framed sliding shower door
5976-48 Framed sliding shower door
5977-48 Framed sliding shower door
5960-46 Framed sliding shower door
5965-46 Framed sliding shower door
5960-48 Framed sliding shower door
1500D-48 Framed pivot shower door
1505D-48 Framed pivot shower door
1506D-48 Framed pivot shower door
1530D-48 Framed pivot shower door
1535D-48 Framed pivot shower door

Included Components

Additional Components:

72321100
72505106
72522100


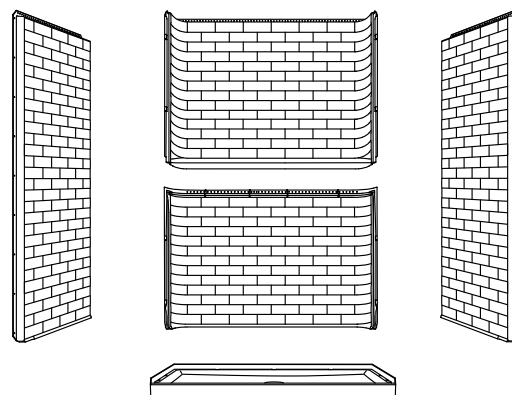


Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
HUD, UM Bulletin 73

STERLING® Vikrell® or Acrylic Baths and Shower Bases Ten-Year Limited Warranty

See website for detailed warranty information.

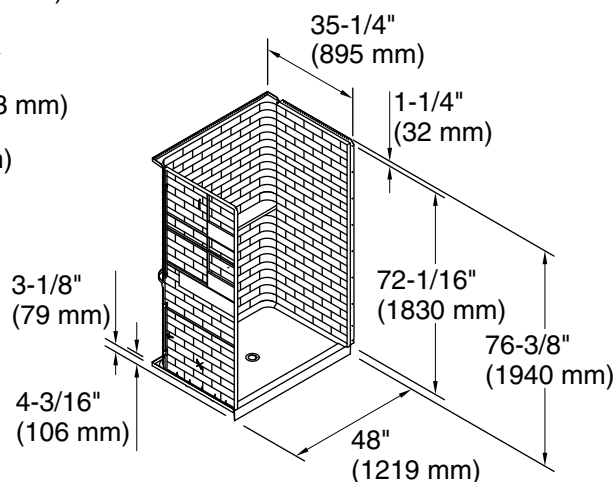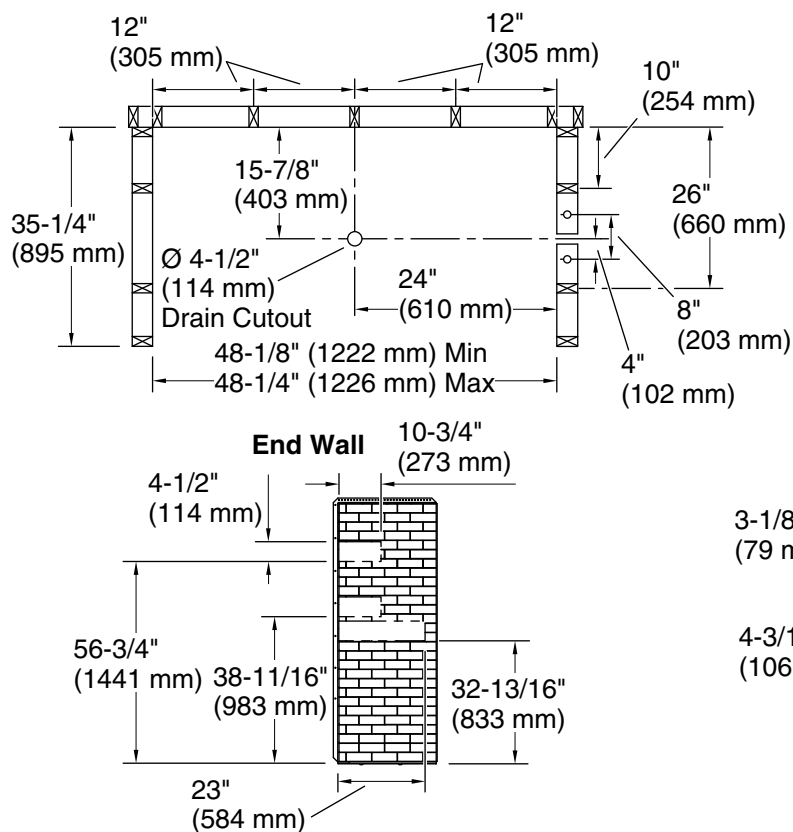

Note: Right and left end walls are the same, only mirrored.

Technical Information

All product dimensions are nominal.

Installation:	Three-wall alcove
Drain location:	Center
Weight:	122 lbs (55.3 kg)
Maximum door height:	72" (1829 mm)
Maximum door width:	44-9/16" (1132 mm)

Notes

Install this product according to the installation instructions.