

# Valton™ Comfort Height®

Two-piece elongated 1.28 gpf toilet 402313-RA

### **Features**

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gallons per flush (gpf).
- Color-matched right-hand white trip lever included.
- 2" fully glazed trapway.
- Combination consists of the 403379 bowl and 404501-RA tank.

## **Technology**

 Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models.

### Installation

- Standard 12" rough-in.
- Three-bolt installation.
- Seat and supply line not included.

## **Recommended Products/Accessories**

K-20110 Brevia<sup>™</sup> Quiet-Close<sup>™</sup> Elongated Toilet Seat K-4636 Cachet® Quiet-Close<sup>™</sup> Elongated Toilet Seat K-5420 Low-Profile Bolt Caps

## **Included Components**

Product consists of: 403379 elongated toilet bowl 404501-RA Toilet tank



## Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

## STERLING® Warranty - Toilets and Lavatories

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.


**Color Code Description** 

) White



# Valton™ Comfort Height®

Two-piece elongated 1.28 gpf toilet 402313-RA

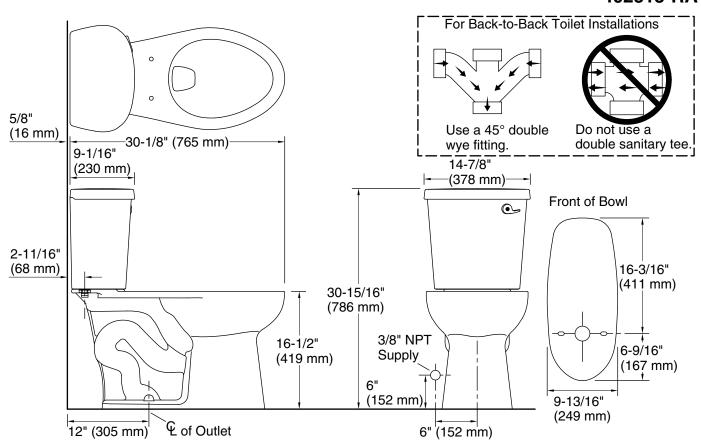

## **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated

Flush type: Gravity siphon jet

Water Consumption

Full: 1.28 gpf (4.8 lpf)
Rough-in: 12" (305 mm)

# **Fixture Supply Requirements**

Min static pressure: 15 psi (103.4 kPa) Max static pressure: 80 psi (551.6 kPa)

#### **Notes**

bathrooms.

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public

Accessibility standards may require controls to be located on the open side of the toilet.