

## GR Widespread Faucet

### FEATURES

- WaterSense® certified low-flow 1.2 gpm faucet
- Brass construction
- Accommodates 8" -11" spread
- Lever handles
- Metal pop-up drain assembly included

### COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel

### PRODUCT SPECIFICATION

Product shall have a maximum flow rate of 1.2 gpm (4.5 lpm). Product shall have a brass construction. Product shall have lever handles. Product shall have a ceramic disk valve cartridges. Product shall include metal pop-up drain assembly. Product shall be TOTO Model TLG02201U#\_\_\_\_\_.

### CODES/STANDARDS


- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9, NSF 372
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, CEC, DoE, NPC Canada, and others
- California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- Complies with federal and state requirements as lead-free (weighted average of 0.25% lead or less)
- ADA compliant
- Complies with CA Prop 65 warning requirements



SPECIFICATIONS

|                   |                                                                          |
|-------------------|--------------------------------------------------------------------------|
| Material          | Brass                                                                    |
| Maximum Flow Rate | 1.2 gpm (4.5 lpm)                                                        |
| Warranty          | Lifetime Limited Warranty (Residential Use)<br>One Year (Commercial Use) |

INSTALLATION NOTES

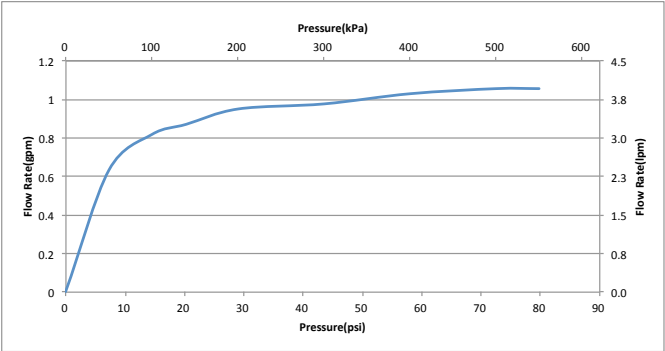

DIMENSIONS

