

Drake® Transitional WASHLET®+ C5 Two-Piece Toilet - 1.28 and 0.8 GPF

FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- High-efficiency dual flush 1.28 & 0.8 GPF (4.8 & 3.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- UNIVERSAL HEIGHT
- Chrome plated trip lever
- 10" Rough-in
- Elongated front bowl and WASHLET+ C5 and tank set
- EWATER®+ auto-cleans wand and bowl
- On-demand remote function cleans wand with EWATER+
- PREMIST® of bowl before each use
- Convenient slim wireless remote, with illuminated touchpad
- Semi-concealed trapway

MODELS & COMPONENTS

- **MW7483046CEMFG.10 (#01)**
With CEFIONTECT ceramic glaze, WASHLET+ C5
 - **CT746CUFGT40.10**
Elongated bowl with CEFIONTECT
 - **ST748EMA**
Tank and cover only
 - **SW3084T40**
WASHLET+ C5

COLORS/FINISHES

- #01 Cotton



- **DYNAMAX TORNADO FLUSH**
- **UNIVERSAL HEIGHT**
- **CEFIONTECT**
- **WATER SAVING**

PRODUCT SPECIFICATION

The two-piece high-efficiency DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.28 GPF/0.8 GPF. Toilet shall be 10" rough-in. Toilet shall have CEFIONTECT ceramic glaze and be at UNIVERSAL HEIGHT. Toilet shall have elongated front bowl and chrome plated trip lever. Toilet shall be TOTO Model MW7483084CEMFG.10#01.

See SW3084T40 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA AB715, CA Green Building Code, Los Angeles Water Efficiency Ordinance and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



MW7483084CEMFG.10

Drake® Transitional WASHLET®+ C5 Two-Piece Toilet - 1.28 and 0.8 GPF

SPECIFICATIONS


| | |
|----------------------------|---|
| Water Use | 1.28 & 0.8 GPF (4.8 & 3.0 LPPF) |
| Flush System | DYNAMAX TORNADO FLUSH® |
| Min. Water Pressure | 8 psi (Static) |
| Water Surface | 5-5/8" x 4-1/8" |
| Trap Diameter | 2-1/2" |
| Rough-in | 10" |
| Trap Seal | 2-1/8" |
| Warranty | One Year Limited Warranty |
| Material | Vitreous China |
| Shipping Weight | CT746CUFGT40.10 66 lbs. ST748EMA 33.1 lbs. SW3084T40 17 lbs. |
| Shipping Dimensions | CT746CUFGT40.10 28-1/4" L x 17-1/4" W1 x 10-3/4" W2 x 17-1/4" H ST748EMA 19-7/8" L x 9-3/8" W x 15-5/8" H SW3084T40 24-3/8" L x 20-3/4" W x 9-1/8" H |

See SW3084T40 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

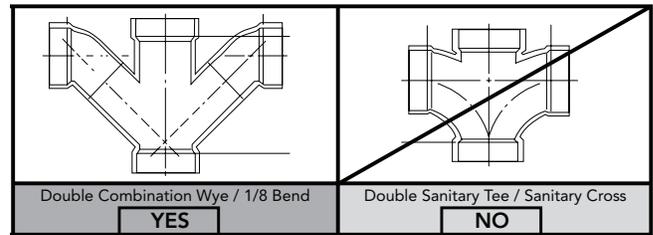

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 10" rough-in distance.

DIMENSIONS

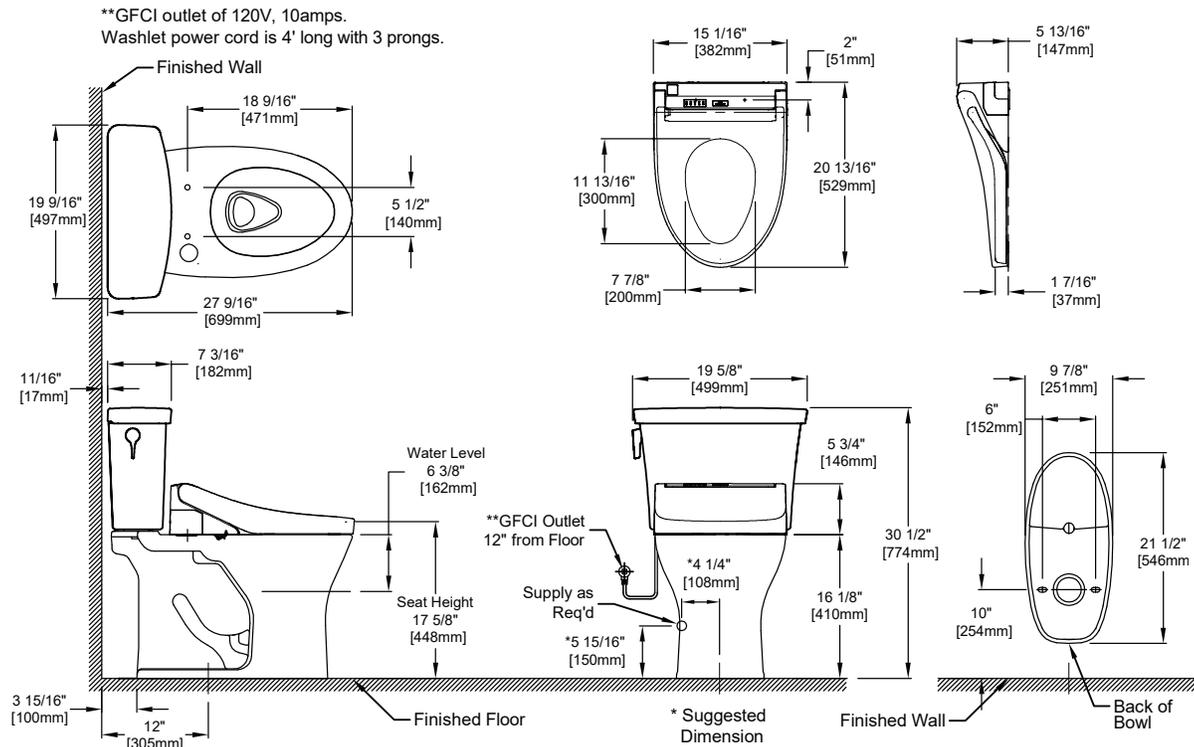

TOTO®

Fixture Dimensions shown are nominal. These dimensions and specifications are subject to change without notice.

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

SS-01876 v.01