



Z5738-U

TAG _____

“The Small Pint®” 0.125-0.5 gpf, EcoVantage®, Ultra Low Consumption Urinal



Z5738 SERIES

Recommended Trim:

- Z6003AV-EWS*** AquaVantage® AV 0.5 gpf low consumption exposed urinal flush valve.
- Z6003AV-WS1** AquaVantage® AV 1.0 gpf low consumption exposed urinal flush valve.
- ZTR6203-ULF-LL***
Sensor Long Life Battery Operated Urinal Flush Valve 0.125 gpf [0.5 Lpf].
- ZTR6203-QRT-LL***
Sensor Long Life Battery Operated Urinal Flush Valve 0.25 gpf [1.0 Lpf].
- ZTR6203-EWS-LL***
Sensor Long Life Battery Operated Urinal Flush Valve 0.5 gpf [1.9 Lpf].

Note: To ensure system performance:
Minimum Running Water Pressure = 25 psi.



* This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
PHONE: 1-800-997-3876 ♦ FAX: 919-775-3541
WWW.ZURN.COM
IN CANADA: ZURN INDUSTRIES LIMITED
7900 GOREWAY DRIVE UNIT 10 ♦ BRAMPTON, ONTARIO L6T5W6
PHONE: 905-405-8272 FAX: 905-405-1292

Z5738 Urinal Series

- Zurn One Ultra Low Consumption Urinal designed for optimal performance between Zurn fixture and flush valve to save water while exceeding industry performance standards .
- 0.125-0.5 gpf [0.5-1.9Lpf]
- Vitreous china
- High efficiency washout flushing action
- Up to 88% water savings over standard 1.0 gpf [3.8 Lpf] system
- 3/4” top spud
- 2” I.P.S. outlet flange and rubber gasket with integral trap
- 14” extended rim for handicap compliance when installed at proper height.
- Assembled with vandal resistant outlet strainer
- Shipping Weight: 39 lbs

Engineering Specification: Recommended Trim:

Z5738-U

Vitreous china, 0.125-0.5 gpf [0.5-1.9Lpf], high efficiency, wall hung, integral trap, washout urinal complete with 3/4” top spud connection, concealed universal retrofit wall bracket, 2” outlet connection and vandal resistant outlet strainer.

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standards A112.19.2 and CAN/CSA B45 requirements.

This space is for Architectural/engineering Approval

See Zurn One Systems for suggested packages.

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.




Z5738-U

TAG _____

“The Small Pint®” 0.125-0.5 gpf, EcoVantage®, Ultra Low Consumption Urinal

Rough-in dimensions for Z5738-U Series

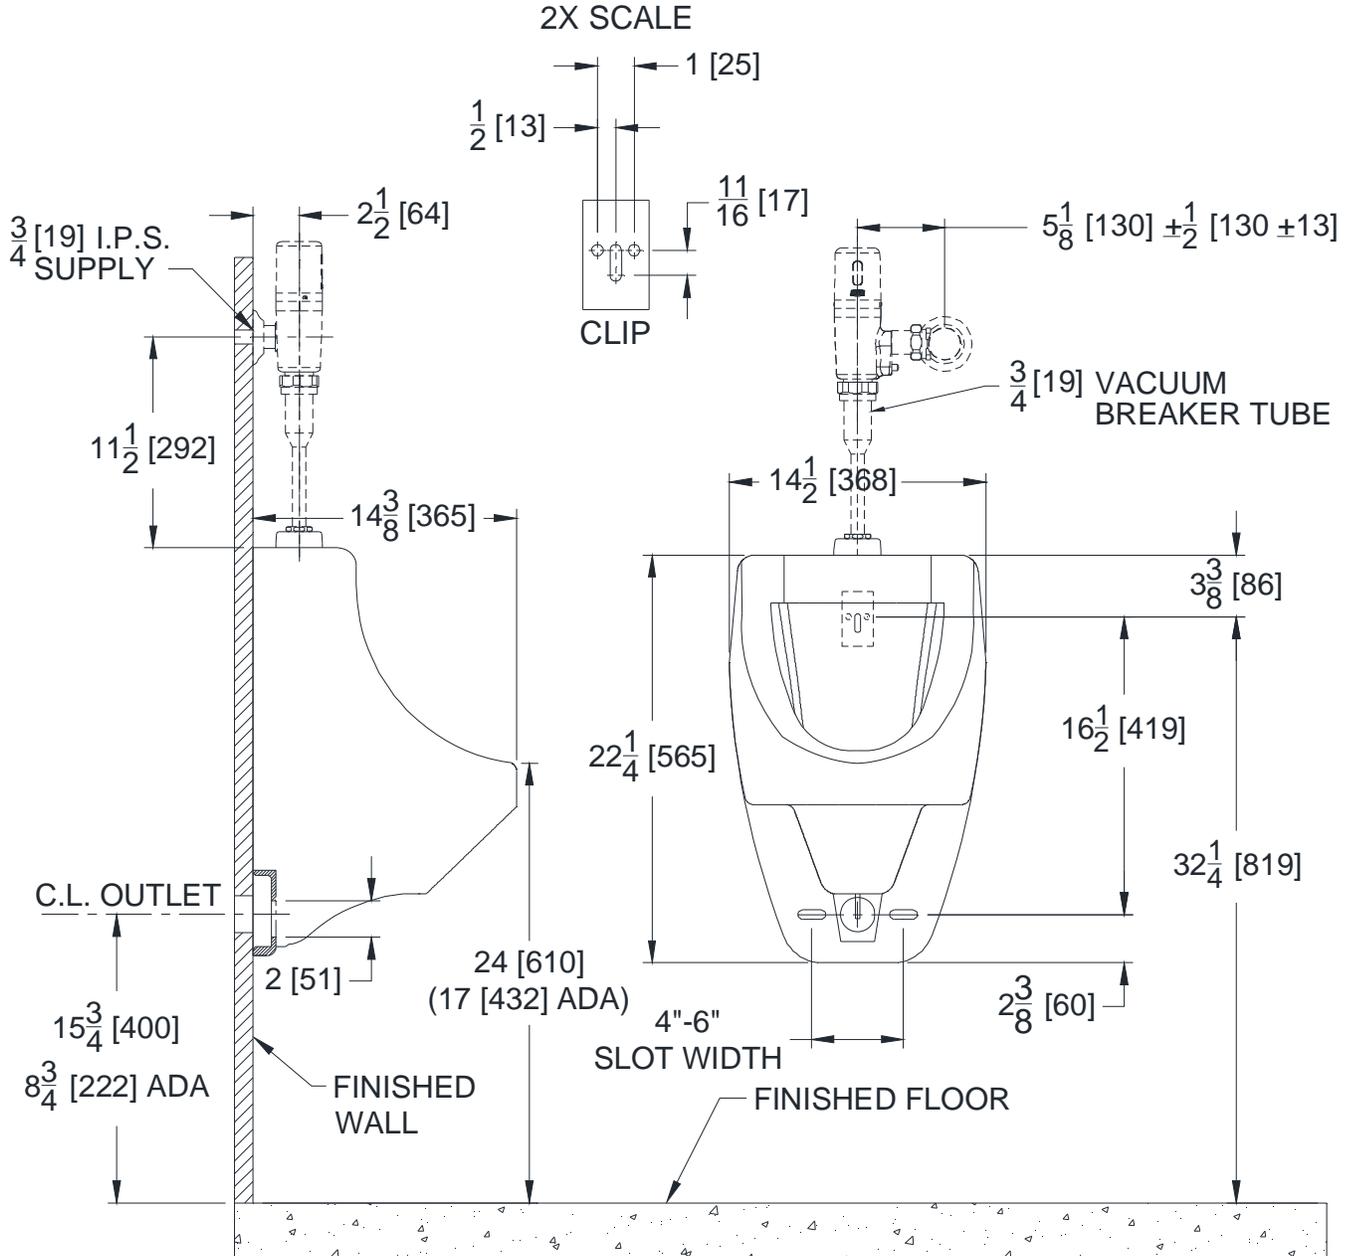

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
PHONE: 1-800-997-3876 ♦ FAX: 919-775-3541
WWW.ZURN.COM

IN CANADA: ZURN INDUSTRIES LIMITED
7900 GOREWAY DRIVE UNIT 10 ♦ BRAMPTON, ONTARIO L6T5W6
PHONE: 905-405-8272 FAX: 905-405-1292

EcoVantage® is a registered trademark of Zurn Industries, LLC.

Rev. B
Dwg. No. 311184

Date: 4/18/2017
Product No. Z5738-U