

ZURN

LABORATORY FAUCET - DOUBLE


Z826C4-XL

TAG _____



Engineering Specifications: Zurn AquaSpec® Z826C4-XL

Polished chrome-plated double laboratory faucet with integral shank, quarter turn ceramic disc cartridges and a 8" [203mm] centerline rigid or swing gooseneck spout. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 4" [102mm] vandal-resistant color-coded metal wrist blade handles, mounting hardware and stainless steel flex connection hoses.

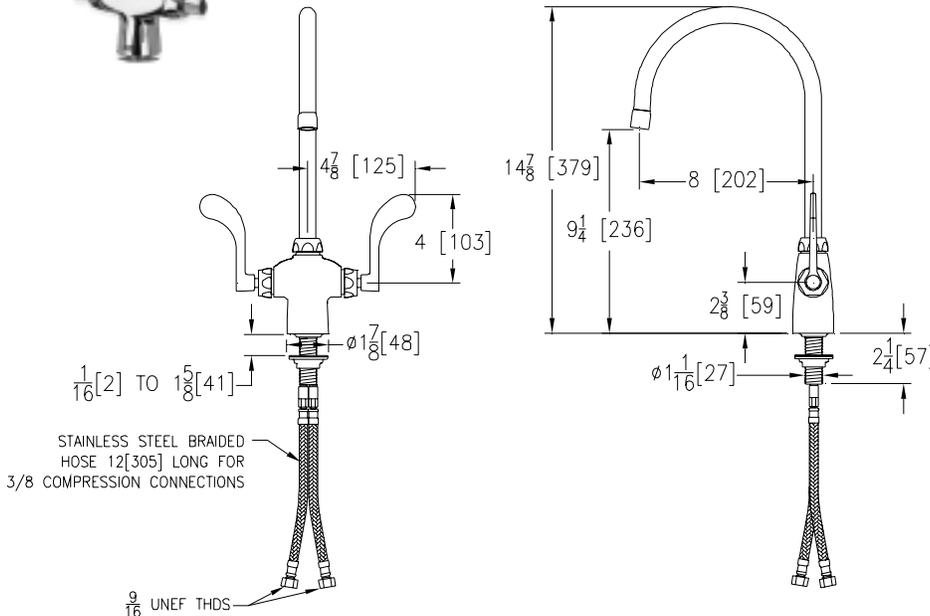

Zurn Lead Compliant* "XL" products are a line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with state laws and local codes that mandate lead content levels. Zurn "XL" products are manufactured with *not more than 0.25% lead content when used with respect to wetted surfaces of pipes and pipe fittings, plumbing fitting and fixtures: California Health & Safety Code § 116875; Vermont 9 VCA § 2470h



Note: All dimensions are for reference only. Do not use for pre-plumbing.

OPTIONAL ACCESSORIES

| Suffix | Description |
|----------|---|
| ___-AR | Anti-Rotation Pins |
| ___-CST | Copper Supply Tubes |
| ___-FC | 2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout |
| ___-G | 1-1/4" [32mm] Grid Strainer Drain |
| ___-HCT | Hot/Cold Text Indexes |
| ___-MY | Mixing Yoke Assembly Instead of Copper Supplies |
| ___-PT | 1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend |
| ___-140 | 140° Restricted Swing Spout |
| ___-2F | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator |
| ___-3F | 0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet |
| ___-4F | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet |
| ___-7F | 1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet |
| ___-16F | 1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet |
| ___-17F | 1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator |
| ___-18F | 1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet |
| ___-18FH | 18" [457mm] S.S. Braided Flex Hoses |
| ___-19F | 1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet |
| ___-21F | 1.0 GPM [3.8L] Pressure Compensating Female Laminar Flow Outlet |
| ___-22F | 1.0 GPM [3.8L] Pressure Compensating Vandal-Resistant Female Laminar Flow Outlet |
| ___-23F | 1.5 GPM [5.7L] Pressure Compensating Female Aerator |

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

AquaSpec® is a registered trademark of Zurn Industries, LLC
©2010 Zurn Industries, LLC

Rev. Date: 8/4/10
Dwg. No. 301674

C.N. No. 126723
Product No. Z826C4-XL