# WIDESPREAD
## Z831C4-XL-HS
## TAG _____

**Engineering Specifications: Zurn AquaSpec® Z831C4-XL-HS**
Polished chrome-plated widespread with adjustable centers from 6" [152mm] to 20" [508mm], a 8" [203mm] centerline rigid or swing gooseneck spout and quarter turn ceramic disc cartridges. Unit is furnished with a hose and spray, a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 4" [102mm] vandal-resistant color-coded metal wrist blade handles, mounting hardware and 1/2" NPSM riser nuts for standard lavatory risers. Widespread accommodates installations up to 1-1/2" [38mm] thick.

Zurn Lead Compliant* "XL" products are a line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with state laws and local codes that mandate lead content levels. Zurn "XL" products are manufactured with *not more than 0.25% lead content when used with respect to wetted surfaces of pipes and pipe fittings, plumbing fitting and fixtures: California Health & Safety Code § 116875; Vermont 9 VCA § 2470h

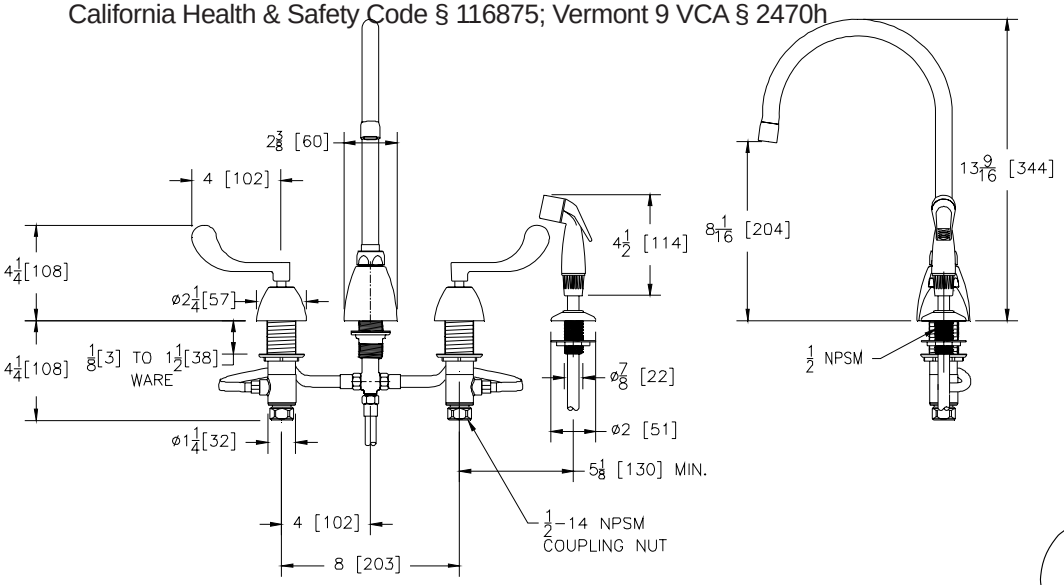


Note: *All dimensions are for reference only. Do not use for pre-plumbing*

ADA DESIGNED

### OPTIONAL ACCESSORIES

| Suffix | | Description |
|---|---|---|
| ____ | -CWO | Cold Water Only |
| ____ | -FC | 2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout |
| ____ | -G | 1-1/4" [32mm] Grid Strainer Drain |
| ____ | -GH | 1-1/4" [32mm] Offset Handicap Grid Drain |
| ____ | -HCT | Hot/Cold Text Indexes |
| ____ | -ICT | Inter-connecting Copper Supply Tubes for 8" In-line Centers |
| ____ | -PT | 1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend |
| ____ | -2F | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator |
| ____ | -3F | 0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet |
| ____ | -4F | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet |
| ____ | -7F | 1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet |
| ____ | -16F | 1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet |
| ____ | -17F | 1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator |
| ____ | -18F | 1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet |
| ____ | -19F | 1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet |
| ____ | -21F | 1.0 GPM [3.8L] Pressure Compensating Female Laminar Flow Outlet |
| ____ | -22F | 1.0 GPM [3.8L] Pressure Compensating Vandal-Resistant Female Laminar Flow Outlet |
| ____ | -23F | 1.5 GPM [5.7L] Pressure Compensating Female Aerator |


**ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733**
**Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com**
**In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292**



AquaSpec® is a registered trademark of Zurn Industries, LLC
©2010 Zurn Industries, LLC



Rev. A Date: 7/12/10 C.N. No. 126552
Dwg. No. 93161 Product No. Z831C4-XL-HS