

see what Delta can do™

IN2ITION®


- 2-In-1 Shower
- 5-Spray Setting Hand Shower

FEATURES:

- Touch-Clean® Spray Holes
- MagnaTite® Docking
- ProClean™ Spray Setting

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa
- Integrated hand shower docks securely into shower head when not in use
- 3-Way diverter allows for single or shared operation of shower head and hand shower
- Change hand shower spray modes with push button - pause in handle - pause is a non-positive shut-off
- 60" (1524 mm) metal hose (Chrome, SN & CZ finishes only)
- 60" (1524 mm) UltraFlex® hose (BL & RB finishes only)
- Ball connector swivel angle is 32° (16° per side)
- Fits standard 1/2"-14 NPT pipe fitting
- 5 Spray settings include: Full body spray, Massage spray, Full w/ massage spray, ProClean™ spray and Pause

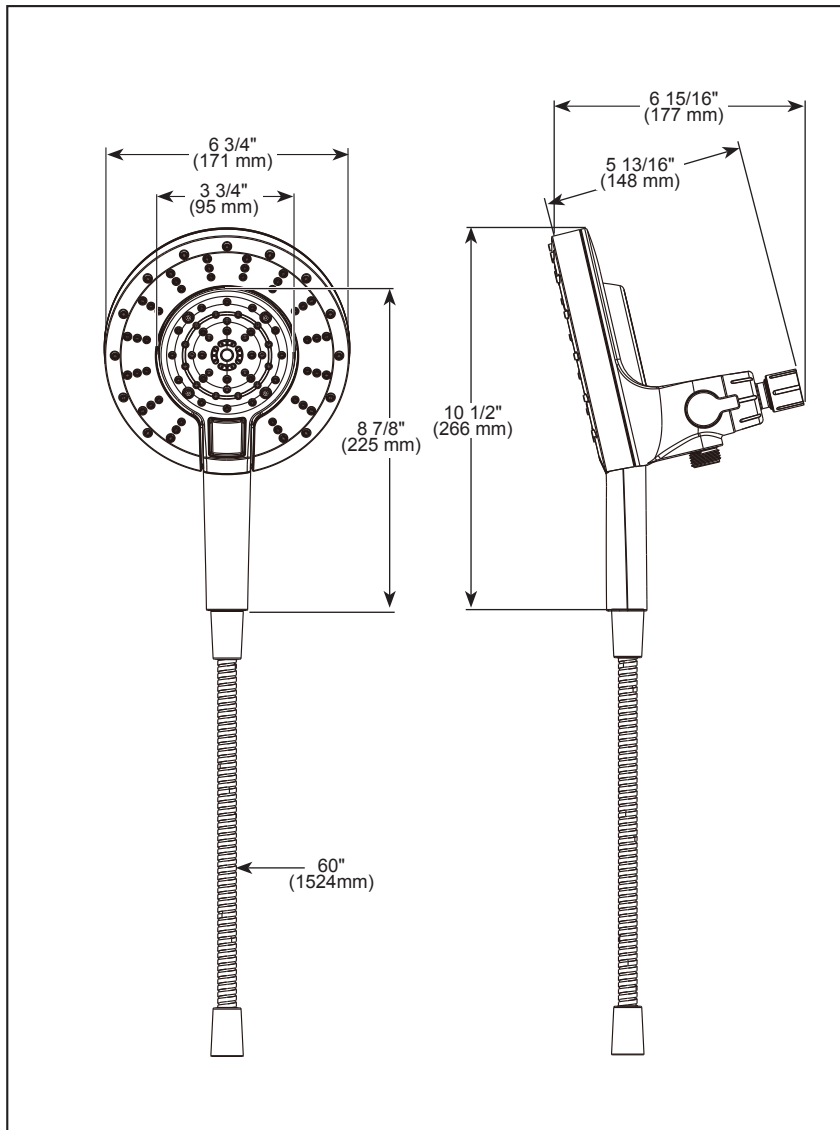

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

▲ Designate proper finish suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-75548 Rev. A

Delta Faucet Company
 55 E. 111th Street, Carmel, IN 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2025 Delta Faucet Company