INSTRUCTIONS

For Assembling and Installing Fixtures in Canada
Pour L'assemblage et L'installation Au Canada

1) Pull supply wire up through center stem.
2) Screw center stem to top of fixture body.
3) Align threaded studs at ends of center column with holes in fixture body.
4) Apply threaded locking compound the threaded studs.
5) Screw finials onto threaded studs.
6) Slip trim over threaded pipe protruding from bottom of fixture and secure in place with finial.
7) Pass wire from fixture through stem and screw stem to coupling at top of fixture. **NOTE: Thread locking compound must be applied to all stem threads as noted with symbol (▸) to prevent accidental rotation of fixture during cleaning, relamping, etc.**
8) Pass fixture wire through remaining stems and screw together.
9) Attach small loop to last stem.
10) Turn off power.
11) Take threaded pipe from parts bag and screw in screw collar loop a minimum of 6 mm (1/4"). Lock into place with hexnut.
12) Run another hexnut down threaded pipe almost touching first hexnut. Now screw threaded pipe into mounting strap. Mounting strap must be positioned with extruded thread faced into outlet box. Threaded pipe must protrude out the back of mounting strap. Connect mounting strap to outlet box.
13) Unscrew the threaded ring from screw collar loop. Take canopy and pass over screw collar loop. Approximately one half of the screw collar loop exterior threads should be exposed. Adjust screw collar loop by turning assembly up or down in mounting strap. Remove canopy.
14) After desired position is found, tighten top hexnut up against the bottom of the mounting strap.
15) Slip canopy over screw collar loop and thread on threaded ring. Attach chain (with fixture connected) to bottom of screw collar loop. Unscrew threaded ring, let canopy and threaded ring slip down.
16) Weave electrical wire and ground wire through chain links no more than 3 inches apart. Pass wire through threaded ring, canopy, screw collar loop, threaded pipe and into outlet box.
17) Connect fixture ground wire to outlet box ground wire with wire connector. (Not provided.) Never connect ground wire to black or white power supply wire.
18) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



19) Raise canopy to ceiling.
20) Secure canopy in place by tightening threaded ring onto screw collar loop.
21) Slip glass over sockets and secure in place with socket rings.

---

1) Passer le fil d'alimentation par la tige centrale.
2) Visser la tige centrale en haut du luminaire.
3) Aligner les goujons filetés à l'extrémité de la colonne centrale avec les trous dans le luminaire.
4) Appliquer le frein filet sur les goujons filetés.
5) Visser les ornements sur les goujons filetés.
6) Passer la garniture sur le tube fileté sortant de la partie inférieure du luminaire et fixer à l'aide de l'ornement.
7) Acheminer le fil du luminaire par la tige et visser la tige dans l'accouplement en haut du luminaire. **REMARQUE: appliquer le frein filet sur tous les filets de la tige indiqués par le symbole (▸) pour empêcher la rotation accidentelle du luminaire pendant le nettoyage, remplacement de lampe, etc.**
8) Acheminer le fil du luminaire par les tiges restantes et visser ensemble.
9) Attacher la petite boucle à la dernière tige.
10) Couper le courant électrique.
11) Visser le tube fileté (qui se trouve avec les pièces détachées) dans le collier-écrou, sur une longueur minimum de 6 mm (1/4 po). Fixer avec un écrou hexagonal.
12) Visser un second écrou hexagonal de manière à ce qu'il touche presque le premier. Visser ensuite le tube fileté sur la patte de fixation, en le faisant dépasser et en dirigeant la partie filetée des vis vers la boîte de jonction. Connecter la patte de fixation à la boîte de jonction.
13) Dévisser la bague filetée du collier-écrou. Passer le cache sur le collier-écrou. Environ la moitié de filetage extérieur de celui-ci doit être apparent. Fixer le collier-écrou en faisant pivoter l'assemblage vers le haut ou vers le bas. Enlever le cache.
14) La bonne position étant trouvée, serrer l'écrou hexagonal supérieur contre le partie inférieur de la patte de fixation.
15) Glisser le cache sur le collier-écrou et enfiler sur la bague filetée. Attacher la chaine (avec l'assemblage connecté) au bas du collier-écrou. Dévisser la bague filetée et laisser glisser le cache et la bague filetée.
16) Entrelacer le fil électrque et le fil de mise á la terre et faire passer le tout dans les anneaux de la chaîne en espaçant au maximum de 3 po. Passer le fil dans la bague filetée, le cache, le collier-écrou, le tube fileté et la boîte de jonction.
17) Avec l'attache-fil (qui n'est pas fourni), connecter le fil de mise á la terre au fil d'alimentation noir ou á celui qui est blanc.
18) Connecter les fils (connecteurs non fournis). Se reporter au tableau ci-dessous pour faire les connexions.

Connecter le fil noir ou rouge de la boite	Connecter le fil blanc de la boîte
A Noir	A Blanc
*Au cordon parallèle (rond et lisse)	*Au cordon parallele (à angles droits el strié)
Au bransparent, doré, marron, ou noir sans fil distinctif	Au transparent, doré, marron, ou noir avec un til distinctif
Fil isolé (sauf fil vert) avec conducteur en cuivre	Fil isolé (sauf fil vert) avec conducteur en argent

*Remarque: Avec emploi d'un fil paralléle (SPT I et SPT II). Le fil neutre est á angles droits ou strié et l'autre fil doit étre rond ou lisse (Voir le schéma).


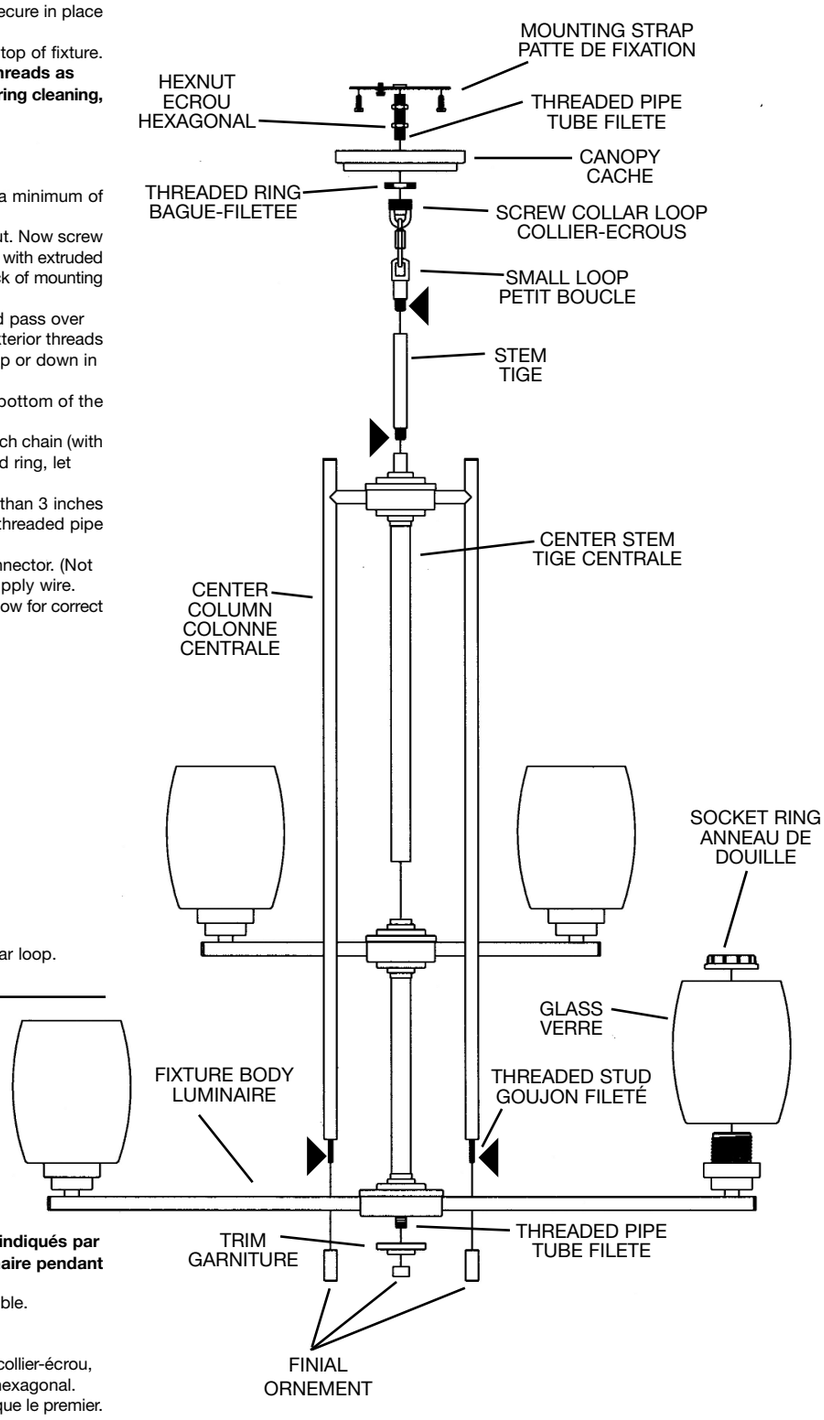
19) Placer le cache au plafond.
20) Fixer le cache en serrant la bague fileté sur le collier-écrou.
21) Faire glisser le verre sur les douille et fixer à l'aide des bague de douille.