

Model EWS2520FC

SPECIFICATIONS

GENERAL

#14 gauge, type 304 (18-8), stainless steel scrub-up sink with 1-3/4" (44mm) radius vertical and horizontal coved corners. 1-1/2" (38mm) rolled rim. Full length 6" (152mm) high backsplash. Exposed surfaces are hand blended to a uniform satin luster finish. Underside is sound deadened. Furnished with wall hanger and stainless steel support brackets.

(CHECK MODEL SPECIFIED)

☐ EWS2520FC

☐ EWS3120FC


FURNISHED COMPLETE WITH:

SUPPLY: LK398C. Wall hung, chrome plated double pedal valve with mounting package.

SPOUT: **LK395A**. Chrome plated 8-3/16" (208mm) high gooseneck spout with AE19A vandal-resistant, antihose aerator. (Intermediate piping not included.)

DRAIN: **LK18B**. Stainless steel perforated strainer grid. 1-1/2" (38mm) O.D. x 4" (102mm) stainless steel

tailpiece.



FOLLOWING MODELS DO NOT INCLUDE FAUCETS AND **DRAIN:**

□ EWS2520

☐ EWS3120

SPECIFY FAUCET DRILLINGS AND LOCATION.

SEE OTHER SIDE FOR PRODUCT DIMENSIONS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not

www.elkay.com




ROUGH-IN DIMENSIONS

DIMENSIONS

Model Number EWS2520								
DIMS.	in.	mm	DIMS.	in.	mm			
Α	25	635	G	7	178			
В	191/2	495	Н	6	152			
С	22	559	ı	101/2	267			
D	16	406	J	7/16	11			
E	11/2	38	К	25/8	67			
F	12 1/2	318	L	17	432			

Model Number EWS3120							
DIMS.	in.	mm	DIMS.	in.	mm		
Α	31	787	G	7	178		
В	191/2	495	Н	6	152		
С	28	711	ı	101/2	267		
D	16	406	J	7/16	11		
E	11/2	38	К	25/8	67		
F	15 ¹ / ₂	394	L	23	584		

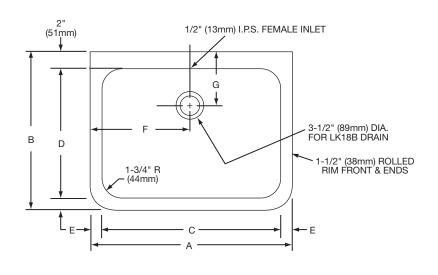

20" (508mm)

