

## Windham™

Two-piece round-front toilet, 1.6 gpf 402323-WTL

#### **Features**

- Two-piece design
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms
- Standard height
- 1.6 gpf (6.0 lpf)
- Color-matched left-hand white trip lever included
- 2-1/8" (54 mm) fully glazed trapway
- Combination consists of the 403017 bowl and 402363-WTL tank
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

#### Installation

- Three-bolt quick-connect installation
- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

## **Recommended Products/Accessories**

K-4775 Brevia™ Quick-Release™ round-front toilet seat

## **Included Components**

402363-WTL Toilet tank, 1.6 gpf 403017 Round-front toilet bowl



### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 IAPMO Certification

## STERLING® Toilet Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.


**Color Code Description** 

0 White



# Windham™

Two-piece round-front toilet, 1.6 gpf 402323-WTL

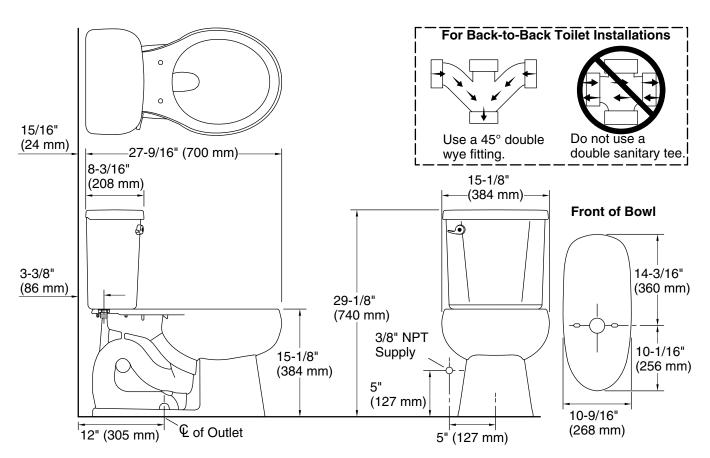

## **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Flush type: ProForce Plus
Trap passageway: 2-1/8" (54 mm)
Rim to water 6-3/16" (157 mm)

surface:

Rough-in: 12" (305 mm)

# **Fixture Supply Requirements**

Min static pressure: 20 psi (137.9 kPa)
Max static pressure: 80 psi (551.6 kPa)
Min flowing 15 psi (103.4 kPa)

pressure:

Min flow rate: 1 gpm (3.8 lpm)

#### **Notes**

Install this product according to the installation instructions.