

## Features

- Two-piece toilet.
- Round-front bowl offers an ideal solution for smaller baths and powder rooms.
- 1.6 gallons per flush (gpf).
- Color-matched left-hand white trip lever included.
- 2" fully glazed trapway.
- Combination consists of the 403377 bowl and 404562 tank.

#### Technology

 Pro Force<sup>®</sup> Plus flushing technology delivers greater flushing power than previous Pro Force<sup>®</sup> models.

#### Installation

- Standard 12" rough-in.
- Three-bolt installation.
- Seat and supply line not included.

## **Recommended Products/Accessories**

K-20111 Brevia<sup>™</sup> Quiet-Close<sup>™</sup> Round-Front Toilet Seat K-4639 Cachet® Quiet-Close<sup>™</sup> Round-Front Toilet Seat K-5420 Low-Profile Bolt Caps

#### **Included Components**

Product consists of: 403377 Round-front toilet bowl 404562 Toilet tank



# **Codes/Standards**

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992

#### STERLING<sup>®</sup> Warranty - Toilets and Lavatories

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.


**Color Code Description** 

0 White

# Valton™

Two-piece round-front toilet 402314

Valton™ Two-piece round-front toilet 402314

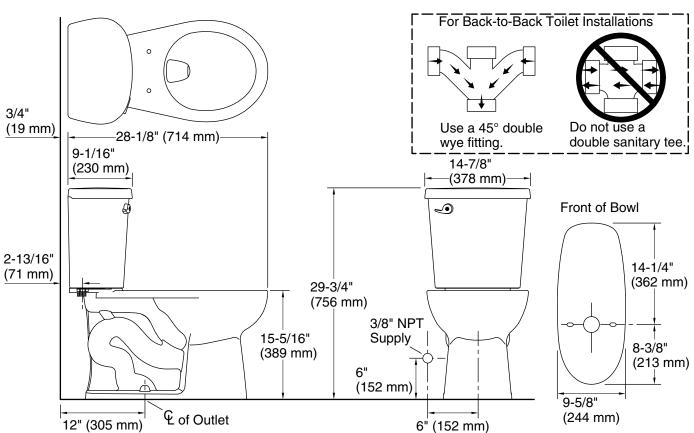

## **Technical Information**

All product dimensions are nominal.

STERLIN

A KOHLER COMPANY

Toilet type:	Two-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Round-front
Flush type:	Gravity siphon jet
Water Consumption	
Full:	1.6 gpf (6 lpf)
Rough-in:	12" (305 mm)

#### **Fixture Supply Requirements**

Min static pressure:	15 psi (103.4 kPa)
Max static pressure:	80 psi (551.6 kPa)

#### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.